



ENERG
енергия · ενεργεια



Haier

AS35XCHHRA-NR/1U35KEHFRA-NR

SEER



kW 3,5
SEER 8,5
kWh/annum 144




56dB



63dB

SCOP

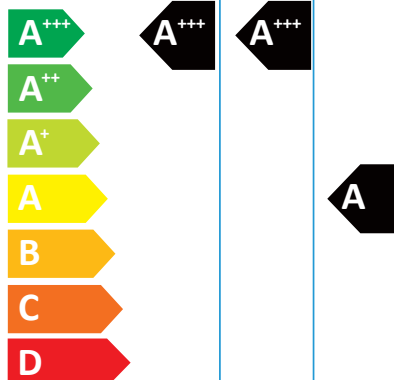

kW 1,9 3,6 5,2
SCOP 5,1 5,1 3,8
kWh/annum 536 988 2874



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE ENERGI
626/2011

General information														
Supplier		Haier Air conditioning												
Outdoor unit		1U68REMFA	1U68REMFA	1U50S2SJ2FA-2	1U50S2SJ2FA-2	1U50S2SJ2FA	1U50S2SJ2FA-2	1U25MECFRA-3	1U35MECFRA-3	1U50S2SJ2FA-2	1U25S2SM1FA-NR	1U35S2SM1FA-NR	1U25KEHFRA-NR	
Indoor unit		AS68TEMHRA	AS68TEDHRA-CL	AS50S2SF1FA-BH	AS50S2SF1FA-MB3	AS50S2SF1FA-BH	AS50S2SF2FA-3	AS25S2SJ1FA-3	AS35S2SJ1FA-3	AS50S2SJ1FA-3	AS25S2SF1FA-MW3	AS35S2SF1FA-MW3	AS25XCHHRA-NR	
		AS68TEBHRA	-	AS50S2SF1FA-WH	AS50S2SF1FA-MW3	AS50S2SF1FA-WH	AS50S2SF1FA-LW	-	-	-	-	-	-	
Sound power	Outdoor unit	dB	65	65	63	63	63	61	62	63	59	61	62	
	Indoor unit	dB	60	60	57	57	57	56	57	57	53	55	55	
Refrigerant	Type		R32	R32	R32	R32	R32	R32	R32	R32	R32	R32	R32	
	GWP	kgCO ₂ eq	675	675	675	675	675	675	675	675	675	675	675	
	Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO ₂ , over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.													
Cooling mode														
cooling performance	SEER		7.1	7.1	7.2	7.2	7.2	8.75	8.75	7.2	8.5	8.5	8.5	
	Energy class		A++	A++	A++	A++	A++	A+++	A+++	A++	A+++	A+++	A+++	
	Qce	kWh/year	350	350	253	253	253	253	104	140	253	107	144	107
	Energy consumption is based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.													
	Pdesignc	kW	7.0	7.0	5.2	5.2	5.2	5.2	2.6	3.5	5.2	2.6	3.5	2.6
Heating mode: Average climate														
Heating performance	Pdesignh temperature	℃	-10	-10	-10	-10	-10	-10	-10	-10	-10	-10	-10	
	SCOP		4.0	4.0	4.6	4.6	4.6	4.6	5.1	5.1	4.6	4.6	4.6	5.1
	Energy class		A+	A+	A++	A++	A++	A++	A+++	A+++	A++	A++	A++	A+++
	Qhe	kWh/year	1963	1963	1400	1400	1401	1400	714	727	1400	731	854	824
	Energy consumption is based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.													
	Pdesignh	kW	5.6	5.6	4.6	4.6	4.6	4.6	2.6	2.65	4.6	2.4	2.8	3.0
	Back-up heating capacity	kW	0.8	0.8	0.8	0.8	0.8	0.8	0.4	0.4	0.8	0.35	0.4	0.2
Heating mode: Warm climate														
Heating performance	Pdesignh temperature	℃	2	2	2	2	2	2	2	2	2	2	2	
	SCOP		5.3	5.3	5.1	5.1	5.6	5.1	6.2	6.2	5.1	5.5	5.5	5.1
	Energy class		A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++
	Qhe	kWh/year	872	872	1316	1316	1190	1316	632	632	1316	662	756	445
	Energy consumption is based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.													
	Pdesignh	kW	3.3	3.3	4.8	4.8	4.8	4.8	2.8	2.8	4.8	2.6	3.0	1.62
	Back-up heating capacity	kW	0	0	0	0	0	0	0	0	0	0	0	0
Heating mode: Cold climate														
Heating performance	Pdesignh temperature	℃	-	-	-	-	-	-	-	-	-	-	-	-22
	SCOP		-	-	-	-	-	-	-	-	-	-	-	3.8
	Energy class		-	-	-	-	-	-	-	-	-	-	-	A
	Qhe	kWh/year	-	-	-	-	-	-	-	-	-	-	-	2376
	Energy consumption is based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.													
	Pdesignh	kW	-	-	-	-	-	-	-	-	-	-	-	4.3
	Back-up heating capacity	kW	-	-	-	-	-	-	-	-	-	-	-	0

General information			Haier Air conditioning											
Supplier														
Outdoor unit			1U35KEHFRA-NR	1U50S2SJ2FA-2	1U50S2SJ2FA	2U40S2SM1FA	2U40S2SM1FA	2U40S2SM1FA	2U40S2SM1FA	2U40S2SM1FA	2U40S2SM1FA	2U40S2SM1FA	2U40S2SM1FA	
Indoor unit			AS35XCHHRA-NR	AS50XCAHRA	AS50XCAHRA	AS25S2SF2FA-2+ AS35S2SF2FA-2	AS25S2SF2FA-3+ AS35S2SF2FA-3	AS20S2SF1FA- MB3 + AS20S2SF1FA- MW3	AS25S2SF1FA- MW3 + AS35S2SF1FA- MW3	AS25S2SJ1FA-3+ AS25S2SJ1FA-3	AS20PBAHRA+ AS20PBAHRA	AS25THMHRA-C+ AS25THMHRA-C	AS25TAEHRA- THC + AS25TAEHRA- THC	AS20TADHRA-2 + AS35TADHRA-2
			-	AS50XCAHRA-MB	AS50XCAHRA-MB									
Sound power	Outdoor unit	dB	63	63	63	62	62	62	62	62	62	62	62	62
	Indoor unit	dB	56	60	60	55	55	53	55	56	54	54	54	55
Refrigerant	Type		R32	R32	R32	R32	R32	R32	R32	R32	R32	R32	R32	R32
	GWP	kgCO ₂ eq	675	675	675	675	675	675	675	675	675	675	675	675
	Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO ₂ , over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.													
Cooling mode														
cooling performance	SEER		8.5	6.6	6.6	6.2	6.2	6.2	6.2	8.5	6.2	6.2	6.2	6.2
	Energy class		A+++	A++	A++	A++	A++	A++	A++	A+++	A++	A++	A++	A++
	Qce	kWh/year	144	265	265	226	226	226	226	165	226	226	226	226
	Energy consumption is based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.													
	Pdesignc	kW	3.5	5.0	5.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Heating mode: Average climate														
Heating performance	Pdesignh temperature	℃	-10	-10	-10	-10	-10	-10	-10	-10	-10	-10	-10	-10
	SCOP		5.1	4.6	4.3	4.0	4.0	4.0	4.0	4.6	4.0	4.0	4.0	4.0
	Energy class		A+++	A++	A+	A+	A+	A+	A+	A++	A+	A+	A+	A+
	Qhe	kWh/year	988	1400	1498	1155	1155	1155	1155	1004	1155	1155	1155	1155
	Energy consumption is based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.													
	Pdesignh	kW	3.6	4.6	4.6	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	Back-up heating capacity	kW	0.4	0.8	1.4	0.1	0.1	0.1	0.1	0.1	0.6	0.6	0.6	0.1
Heating mode: Warm climate														
Heating performance	Pdesignh temperature	℃	2	2	2	2	2	2	2	2	2	2	2	2
	SCOP		5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1
	Energy class		A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++
	Qhe	kWh/year	536	1235	1235	878	878	878	878	878	768	768	768	878
	Energy consumption is based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.													
	Pdesignh	kW	1.95	4.5	4.5	3.2	3.2	3.2	3.2	3.2	2.8	2.8	2.8	3.2
	Back-up heating capacity	kW	0	0	0	0	0	0	0	0	0	0	0	0
Heating mode: Cold climate														
Heating performance	Pdesignh temperature	℃	-22	-	-	-	-	-	-	-	-	-	-	-
	SCOP		3.8	-	-	-	-	-	-	-	-	-	-	-
	Energy class		A	-	-	-	-	-	-	-	-	-	-	-
	Qhe	kWh/year	2874	-	-	-	-	-	-	-	-	-	-	-
	Energy consumption is based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.													
	Pdesignh	kW	5.2	-	-	-	-	-	-	-	-	-	-	-
	Back-up heating capacity	kW	0	-	-	-	-	-	-	-	-	-	-	-

此框内由厂家印说明书专用号一维码（厂家生成），宽51*高12mm。此绿框仅用于定位，实际印刷时删掉。